

## Clamp electrodes for ECG recording

Clamps are made in one piece only to avoid the weakness of spring

### Clamp electrode



Cod. **CLAG0000**  
clamp electrode with silver chloride sensor adaptable to universal connection

Cod. **CLNK0000**  
clamp electrode with nickel sensor adaptable to universal connection

### Paediatric clamp electrode



Cod. **CLAGP000**  
clamp electrode with silver chloride sensor adaptable to universal connection

Cod. **CLNKP000**  
clamp electrode with nickel sensor adaptable to universal connection

### Traditional clamp electrode



Cod. **CLAG000M** Clamp electrode with silver chloride sensor adaptable to universal connection

Cod. **CLAGP00M** Clamp electrode with silver chloride sensor adaptable to universal connection

Cod. **CLAG1000** clamp electrode with non metallic AgAgCl sensor adaptable to universal connection

## Suction chest electrodes for ECG recording

### Suction chest electrodes



Cod. **SUAG0015** Silver plated and silver chloride diam.15mm suction chest electrode

Cod. **SUAG0024** Silver plated and silver chloride diam. 24mm suction chest electrode

Cod. **SUAG0030** Silver plated and silver chloride diam. 30mm suction chest electrode



Cod. **SUNK0015** Nickel plated diam. 15mm suction chest electrode

Cod. **SUNK0024** Nickel plated diam. 24mm suction chest electrode

Cod. **SUNK0030** Nickel plated diam. 30mm suction chest electrode

## Connecting lead wires

### Connecting lead wire with snap connection



CE

|                 |   |
|-----------------|---|
| Cod. LEAD621100 | 60cm long lead wire with snap connection and 2mm pin BLACK colour                 |
| Cod. LEAD621200 | 60cm long lead wire with snap connection and 2mm pin RED colour                   |
| Cod. LEAD621300 | 60cm long lead wire with snap connection and 2mm pin GREEN colour                 |
| Cod. LEAD621400 | 60cm long lead wire with snap connection and 2mm pin YELLOW colour                |
| Cod. LEAD621500 | 60cm long lead wire with snap connection and 2mm pin WHITE colour                 |
| Cod. LEAD102110 | 100cm long lead wire with snap connection and 2mm pin BLACK colour                |
| Cod. LEAD102120 | 100cm long lead wire with snap connection and 2mm pin RED colour                  |
| Cod. LEAD102130 | 100cm long lead wire with snap connection and 2mm pin GREEN colour                |
| Cod. LEAD102140 | 100cm long lead wire with snap connection and 2mm pin YELLOW colour               |
| Cod. LEAD102150 | 100cm long lead wire with snap connection and 2mm pin WHITE colour                |
| Cod. LEAD626100 | 60cm long lead wire with snap connection and Touch proof connector BLACK colour   |
| Cod. LEAD626200 | 60cm long lead wire with snap connection and Touch proof connector RED colour     |
| Cod. LEAD626300 | 60cm long lead wire with snap connection and Touch proof connector GREEN colour   |
| Cod. LEAD626400 | 60cm long lead wire with snap connection and Touch proof connector YELLOW colour  |
| Cod. LEAD626500 | 60cm long lead wire with snap connection and Touch proof connector WHITE colour   |
| Cod. LEAD102610 | 100cm long lead wire with snap connection and Touch proof connector BLACK colour  |
| Cod. LEAD102620 | 100cm long lead wire with snap connection and Touch proof connector RED colour    |
| Cod. LEAD102630 | 100cm long lead wire with snap connection and Touch proof connector GREEN colour  |
| Cod. LEAD102640 | 100cm long lead wire with snap connection and Touch proof connector YELLOW colour |
| Cod. LEAD102650 | 100cm long lead wire with snap connection and Touch proof connector WHITE colour  |

## Adapters and esu grounding pad connecting cable


### Adapters with snap connection



CE

|               |   |
|---------------|---|
| Cod. ADPT4F01 | with snap connection and 4mm socket BLACK colour  |
| Cod. ADPT4F02 | with snap connection and 4mm socket RED colour    |
| Cod. ADPT4F03 | with snap connection and 4mm socket GREEN colour  |
| Cod. ADPT4F04 | with snap connection and 4mm socket YELLOW colour |
| Cod. ADPT4F05 | with snap connection and 4mm socket WHITE colour  |

### Adapters with snap connection



CE

|               |  |
|---------------|--|
| Cod. ADPO50M4 | with snap connection and 4mm male BLACK colour connector |
| Cod. ADPOF0M4 | with snap socket and 4mm male BLACK colour connector     |

### 2mm/4mm adapter for snap connection



CE

|              |                                       |
|--------------|---------------------------------------|
| Cod. ADPL24F | with snap connection and 2/4mm socket |
|--------------|---------------------------------------|

## ECG disposable/repositionable electrodes with solid gel.

### Technical features:


The wire is fixed to the electrode with a "hot-melt" technique to avoid the cable to come off.

The all surface in AgAgCl is conductive. The solid gel offers a high adherence

The coloured lead wires are available with 4mm or T.P. sockets

Disposable AgAgCl electrodes (yellow, red, black colours)

## Neonatal disposable AgAgCl electrode with coloured lead wire



|                 |   |
|-----------------|---|
| Cod. CDE0246026 | 24mm diam. electrode with 60cm long lead wire and Touch proof connector |
| Cod. CDE02460F4 | 24mm diam. electrode with 60cm long lead wire and 4mm socket            |
| Cod. CDE0249026 | 24mm diam. electrode with 90cm long lead wire and Touch proof connector |
| Cod. CDE02490F4 | 24mm diam. electrode with 90cm long lead wire and 4mm socket            |
| Cod. CDE0306026 | 20mm diam. electrode with 60cm long lead wire and Touch proof connector |
| Cod. CDE03060F4 | 20mm diam. electrode with 60cm long lead wire and 4mm socket            |
| Cod. CDE0309026 | 20mm diam. electrode with 90cm long lead wire and Touch proof connector |
| Cod. CDE03090F4 | 20mm diam. electrode with 90cm long lead wire and 4mm socket            |

## RADIOLUCENT electrodes for ECG application

The electrodes are made with radiolucent components. The carbon lead wires are fixed to the electrodes with a "hot-melt" technique to avoid the cable to come off. The all surface in AgAgCl is conductive

Available with lead wires with 4mm or T.P. sockets.


Tested also for MEG and MCG.

## RADIOLUCENT electrodes



|                 |   |
|-----------------|---|
| Cod. CDER246026 | 24mm diam. electrode with 60cm long lead wire and Touch proof connector |
| Cod. CDER249026 | 24mm diam. electrode with 90cm long lead wire and Touch proof connector |
| Cod. CDER2460F4 | 24mm diam. electrode with 60cm long lead wire and 4mm socket            |
| Cod. CDER2490F4 | 24mm diam. electrode with 90cm long lead wire and 4mm socket            |

## Disposable Repositionable AgAgCl electrode with stud connector

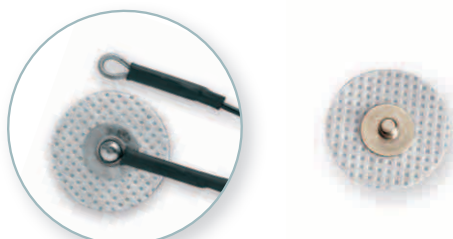

Cod. CDES000024  
24mm diam AgAgCl electrode with stud connector

Cod. LEDCDE0026  
100cm long lead wire with spring connection and Touch proof connector